

Faro Square 100

TECHNOLOGY



Flow Sense

A built-in protector against power-related issues, ensuring lasting performance and safety.



Split & Seal

Uses protective polymers to shield Filix products from water and moisture, boosting durability and resilience.



Heat Sense

Automatically reduces LED power at high temperatures, ensuring longevity and safety in Filix products.



ASHRAE/IEC 90.1 Compliant

Defines energy efficiency standards for building design, focusing on insulation, HVAC, and sustainable energy use.

Qualicoat Seaside Class Powder Coat

Enhanced powder coating for aluminum, specifically formulated for superior durability and optimal performance in marine environments, lasting for over 10 years.



Faro Square 100

Specification Sheet



ETL Intertek (Pending)
IP66/IP67

LUMINAIRE FEATURES

Design and Application

- Square outdoor projector
- For medium to large-scale facades and structures

Mechanical details

- IK08 crystal-clear tempered glass, 4 mm (0.15") thick
- IP66 protected against powerful water jets
- IP67, rated for temporary submersion (30min) in water up to 1m
- 3G vibration rating resistance (ANSI C136.32)
- Die-Cast aluminium body
- Double surface protected with anodised base layer and powder coat top layer in Qualicoat Seaside standard
- Surface Installation
- Supplied with 0.5 m (1.64') oil and water resistant feed cable as standard

Electrical details

- LED Lifetime TM-21 @ 105°C
L80(24K) = 145,000 hours
- Operating temperature -40°C (-40°F) to +50°C (122°F)
- CRI >85
- 3 step MacAdam
- Integral or remote power supply
- Class I with integral power supply, Class III with remote power supply

Controls

- DMX, Integral or with compatible LED power supply,
- DALI, Integral or with compatible LED power supply,
- 0-10V, Integral or with compatible LED power supply,
- Mains, with compatible LED power supply

Sustainability

- Recyclable material
- Repairable
- Dark Sky compliant

Integrated Systems

- Split & Seal
- Heat Sense
- Flow Sense

Links & Downloads

- [List of available drivers](#)
- [Voltage drop calculator](#)
- [Fixture installation manual](#)
- [CAD files](#)
- [IES-LTD data](#)



Faro Square 100

ORDERING INFORMATION

☒	MODEL		☐	FINISH	
☒	FFS10		☐	W	• W - RAL9003 Structure (Signal White)
☐	POWER		☐	S	• S - RAL7044 Structure (Silky Grey)
☐	L	• L - 20W, 2000 lm	☐	A	• A - RAL7016 Structure (Antracite Grey)
☐	H	• H - 30W, 3000 lm	☐	B	• B - RAL9005 Structure (Jet Black)
☐	COLOR TEMP.		☐	D	• D - RAL 1015 Structure (Desert Sand)
☐	AM	• AM - Amber	☐	G	• G - RAL 6002 Structure (Leaf Green)
☐	27	• 27 - 2700K	☐	INTERNAL LIGHT CONTROL	
☐	30	• 30 - 3000K	☐	0	• 0 - No internal light control
☐	OPTICS		☐	1	• 1 - Microlouvre
☐	SP	• SP - Narrow Spot (8X8°)	☐	2	• 2 - Hex louvre
☐	MS	• MS - Medium Spot (15X15°)	☐	4	• 4 - Halfmoon
☐	NF	• NF - Narrow Flood (30x30°)	☐	5	• 5 - Honeymoon
☐	MF	• MF - Medium Flood (40x40°)	☐	EXTERNAL LIGHT CONTROL	
☐	W	• W - Wide (60x60°)	☐	0	• 0 - No external light control
☐	SY	• SY - Spot Elliptical (10°x20°)	☐	1	• 1 - Snoot
☐	NY	• NY - Narrow Elliptical (10°x40°)	☐	INSTALLATION TYPE	
☐	MY	• MY - Medium Elliptical (10°x60°)	☐	B	• B - Base
☐	INPUT OPTIONS		☐	E	• E - Spike
☐	CC	• CC - Constant current	☐	F	• F - Tree Strap
☐	110	• 110 - 110-277VAC, 60Hz	☐	G	• G - Pole Base
☐	230	• 230 - 220-240VAC, 50Hz	☐	CABLE LENGTH OPTIONS	
☐	CONTROL		☐	0.5	• 0.5 - standard feed cable 0.5m (1,6')
☐	0	• 0 - ON-OFF operation	☐	00	
☐	D	• D - DALI Operation			



Faro Square 100

OPTIONAL ACCESSORIES

Power supplies

DRIVERS

[LINK](#)

- List of available drivers

Various Accessories

VARIOUS

203953

- 203953 - Safety wire rope




Faro Square 100


INSTALLATION DETAILS

Fixture


Die-cast aluminium projector for façade, architectural, landscape, and accent lighting, built for harsh outdoor use with IK08 tempered glass and IP66/IP67 protection. Double-protected finish (anodised base + Qualicoat Seaside powder coat) and a 0.5 m oil- and water-resistant feed cable are standard, with integrated Flow Sense, Heat Sense, Split & Seal, and power protection for long-term reliability. DMX/DALI/0-10V/mains control is supported with a compatible LED power supply.

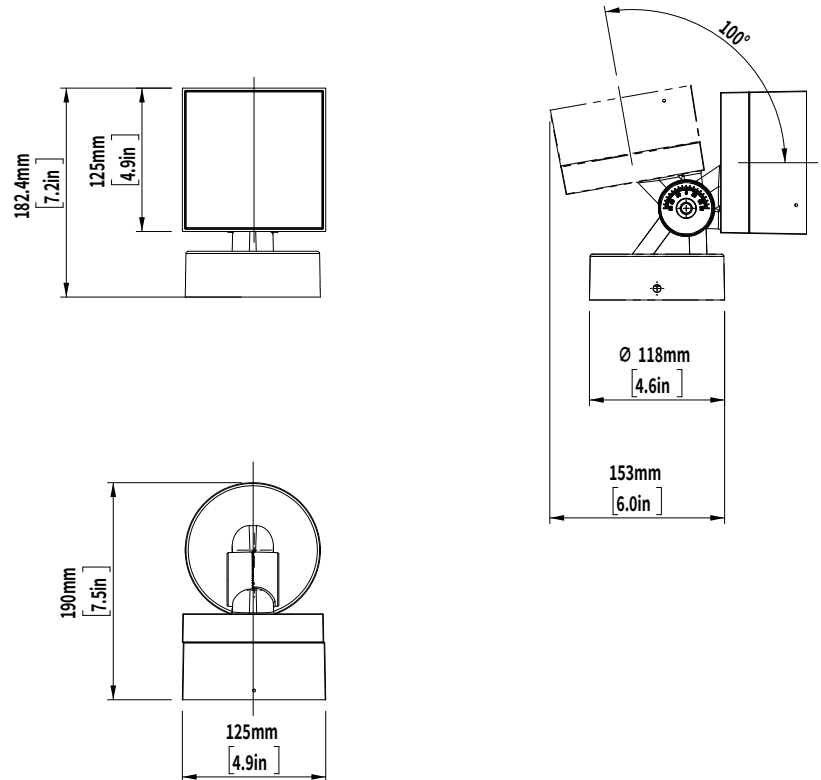

Spike installation

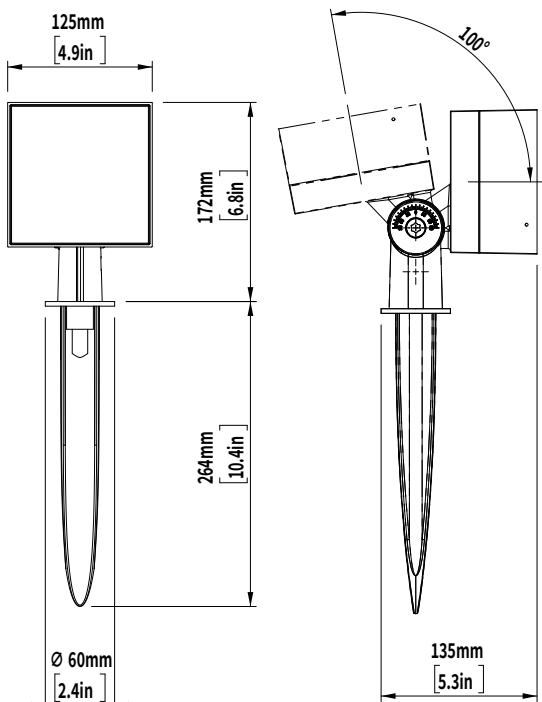

Tree strap/pole installation

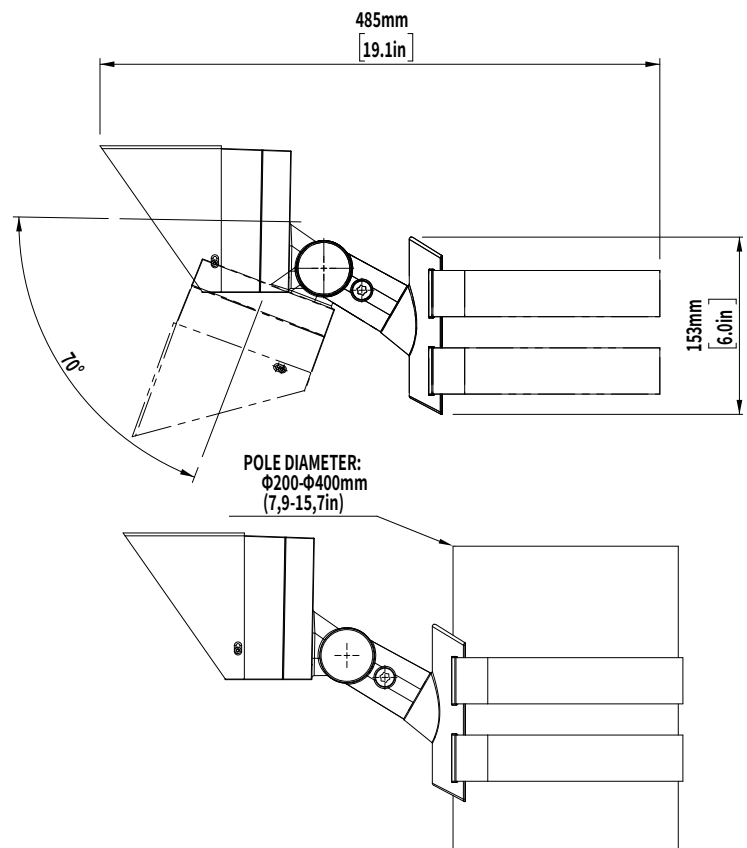




Faro Square 100

INTERNAL LIGHT CONTROL


Microlouvre

Provides low glare control with 30% less lumen output than product without louvres. Best for use where pedestrians are at least 6m (20ft) from the light source




Hex louvre

Provides low glare control with 45% less lumen output than product without louvres. Best for use when there is no need for segment beam cut off such as in half moon




Halfmoon

Provides glare control by reducing lumen output and implementing a light beam cut-off, resulting in a 50% reduction in stray light and minimized light dispersion in undesirable directions.



Honeymoon

Combines the benefits of Hex Louvre and Halfmoon, offering both reduced glare and controlled light dispersion for comprehensive glare management.






Faro Square 100

EXTERNAL LIGHT CONTROL

Snoot

External attachment providing enhanced glare control, effectively shielding the light source to reduce direct glare and prevent light spill in unwanted directions.

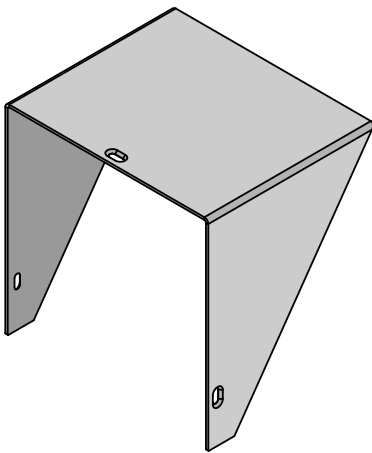




Faro Square 100

OPTIONAL ACCESSORIES


Power supply

A LED power supply, is an electrical device designed to control the power supplied to an LED or an array of LEDs. It plays a critical role in LED lighting systems as LEDs demand a specific type and level of electrical current or voltage for optimal operation. It's important to note whether a constant current or constant voltage LED power supply is required. The power supply should be installed in a dry and easily accessible area.



Safety wire rope

300mm long safety bond for added security during high-altitude installations

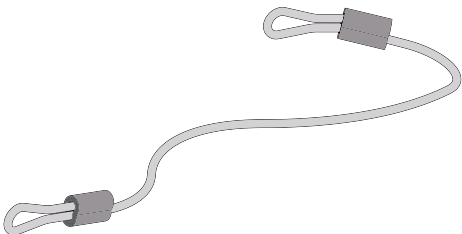




Faro Square 100

INSTALLATION OPTIONS


Base installation

Securely mounts the projector on a stable base, integrating wiring for a clean and permanent setup, ideal for environments requiring stable installations.




Spike installation

Ground spike-based setup allows easy insertion into the soil, perfect for flexible outdoor applications and landscape lighting.

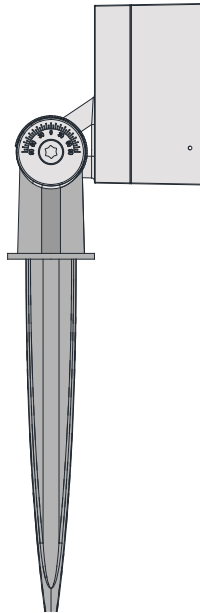


Tree strap installation

Adjustable metal strap secures the projector to a tree or branch, providing a versatile, non-invasive installation for natural settings.

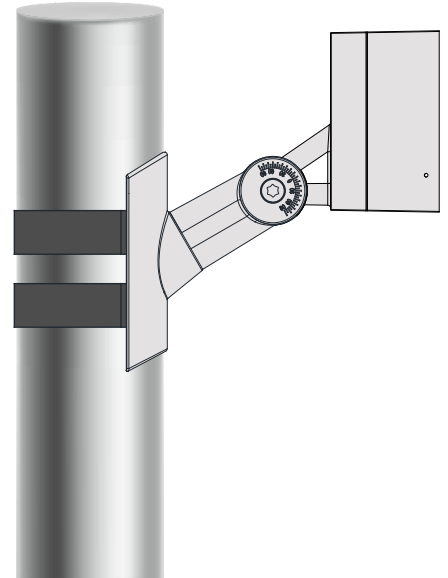

Pole base installation

Attaches the projector to a pole with an integrated wiring base, suitable for elevated, stable installations like street lighting.

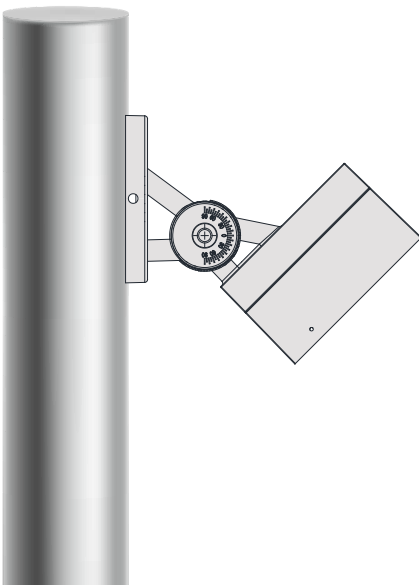





Faro Square 100

OPTICS


Narrow Spot
Angle: 8°x8°








Medium Spot
Angle: 15°x15°




Narrow Flood
Angle: 30°x30°




Medium Flood
Angle: 40°x40°

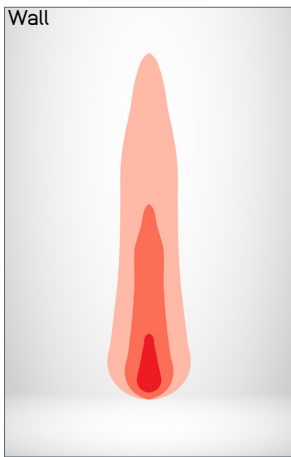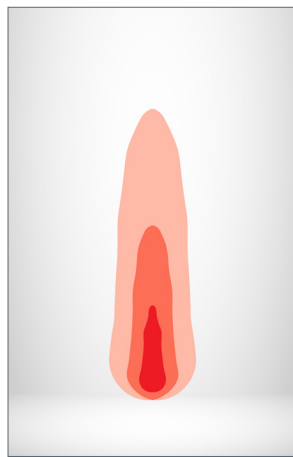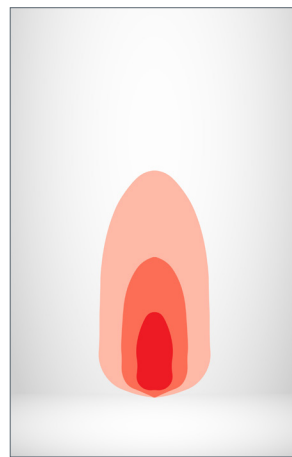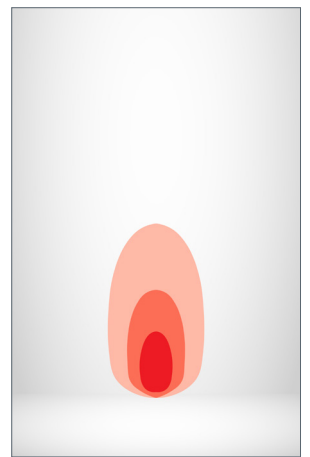


Wide
Angle: 60°x60°








Spot Asymmetric
Angle: 10°x20°



Narrow Asymmetric
Angle: 10°x40°



Medium Asymmetric
Angle: 10°x60°

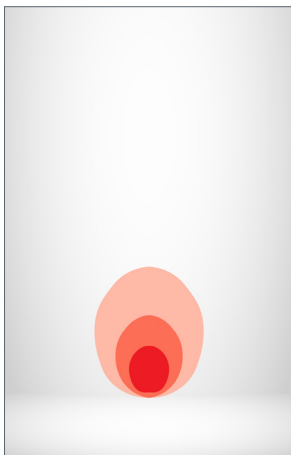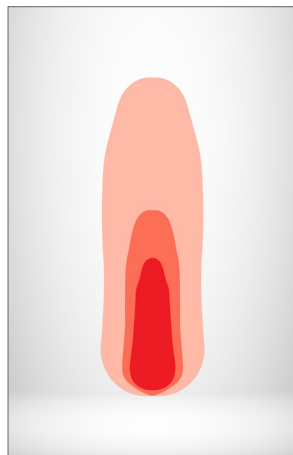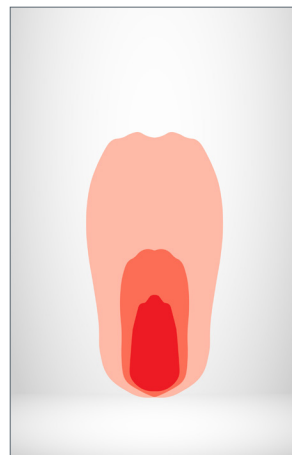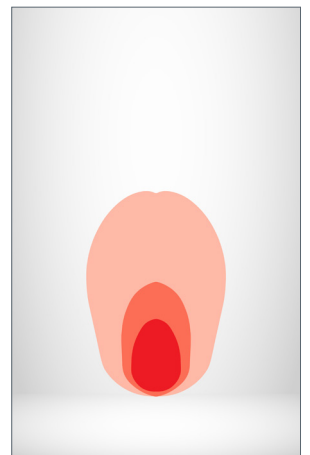



Control


SYSTEM TOPOLOGY - CONSTANT CURRENT

System components

- The luminaire is supplied with a factory-installed feed cable in standard lengths for connection to the PSU circuit, and mounting hardware as specified in the installation instructions
- A compatible constant current LED driver, series connection cabling between the driver and luminaires, junction boxes, connection infrastructure, and the control system (DALI, DMX, 0–10V or switching) must be provided by the installer or customer
- Recommended components:
 - Surge protection on the AC side of the driver
 - Connectors and junction boxes suitable for the installation environment
 - Drivers with compatible dimming interfaces required by the project

System topology

- Constant current systems use a series connection topology where luminaires are connected sequentially within a single driver circuit

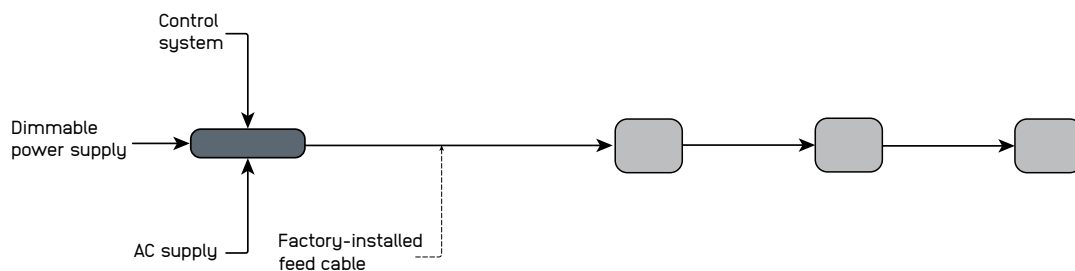

Addressing & dimming notes

- Individual device or channel addressing can be achieved by connecting each product to a separate output channel of the DALI or DMX compatible driver
- The PSU adjusts output current according to the control signal
- Dimming options depend on the PSU and the selected control system

Segment length and limitations

- The minimum controllable segment is one product
- Maximum number of luminaires depends on the driver output current and total forward voltage of the connected luminaires
- The total forward voltage must remain within the driver operating range

Fault tolerance

- Failure of the control system or communication bus does not interrupt luminaire operation if the driver continues to supply current
- Failure of one luminaire may interrupt operation of the entire circuit due to the series connection topology
- System reliability depends on correct driver selection and proper electrical installation



Control


DALI SYSTEM TOPOLOGY

System components

- The DALI system, wiring, protective devices and junction boxes leading up to feed cable at the start of the line are the responsibility of others
- Feed cables and necessary accessories that are marked as mandatory must be ordered separately
- For optional branching of the system Power & Data Splitter must be used
- Advised protective components:
 - Surge protector device
 - Inrush current limiter

System topology

- In the system design, any of the following system topologies can be utilized: line wiring, star wiring, or tree wiring

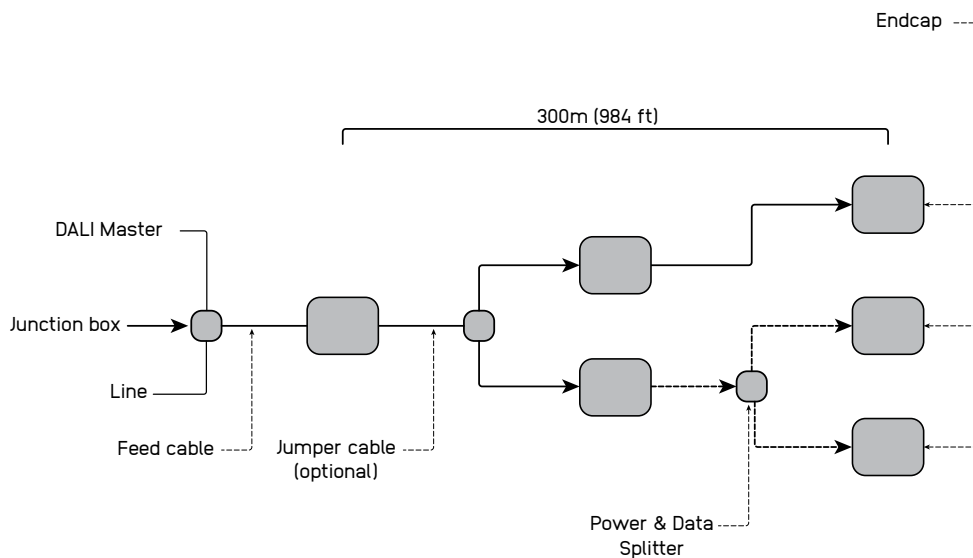

Addressing & dimming notes

- DALI protocol allows addressing devices individually
- Addressing methods include a short address for individual devices, group addresses for up to 16 groups, and a broadcast address that targets everything on the line
- Logarithmic and linear dimming options available. the product is initially equipped with logarithmic dimming settings, while you can easily switch to logarithmic dimming using a configuration device
- 0%-100% dimming range

Segment length and limitations

- The minimum segment length is equal to one product
- A DALI master has the capacity to manage a line containing a maximum of 64 devices. Each device can be allocated to 16 unique groups and 16 individual scenes
- The maximum distance between two fittings is 30 meters [98ft] , and the maximum distance between the first and last fitting is 300m [984ft].
- Used in single colour and tunable white applications

Fault tolerance

- Due to its relatively slow operating speed and high bus voltage, the DALI system exhibits significant reliability in the presence of electrical interference, making shielding unnecessary
- If one product fails the rest of the system continues to work